
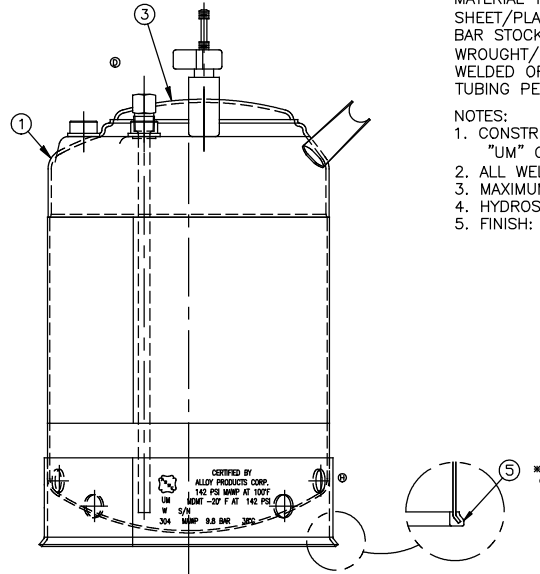
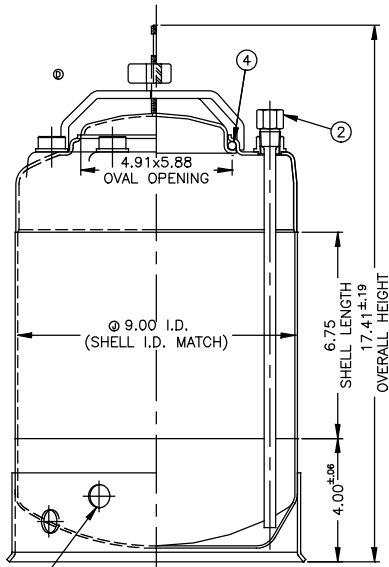


REVISION
7-16-2001
014101
9-28-2006
015555
10-17-2006
015614
1-18-2008
015884
8-21-2008
015938
10-11-2008
015992
3-23-2010
016194
1-14-2013
016694
6-05-2013
016771
1-24-2018
017425
1-24-2018
017692

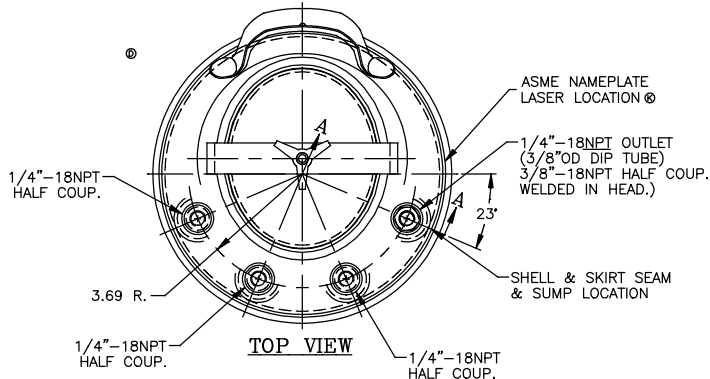

ITEM	DWG./PART NO.	MATERIAL	QTY.
1	C208-0320-00	LOC 9" TANK WELDMENT	304 1
2	A206-4429-00	DIP TUBE ASSEMBLY	304 1
3	C506-0497-00	VACUUM CLOSURE LID ASSEMBLY	304 1
4	A100-0376-00	CLOSURE SEAL O-RING	E.P.D.M.
	A100-0280-00		VITON
	A100-0383-00		T.E.V.
5	A109-0003-00	RUBBER BOOT	EPDM 1

* SEE CURRENT SHOP ORDER FOR O-RING TYPE TO BE USED.

** ITEM 5 IS OPTIONAL. INSTALL ONTO SKIRT WHEN P/N C530-3519-00-X-R IS ORDERED. (X BEING O-RING CHOICE E, F, OR V).

MATERIAL NOTES:
 MATERIAL TO BE TYPE 304 STAINLESS STEEL.
 SHEET/PLATE STOCK PER A.S.M.E. SPEC. SA-240.
 BAR STOCK PER A.S.M.E. SPEC. SA-479.
 WROUGHT/FORGED STOCK PER A.S.M.E. SPEC. SA-182.
 WELDED OR SEAMLESS PIPE PER A.S.M.E. SPEC. SA-312.
 TUBING PER A.S.M.E. SPEC. SA-249.

NOTES:
 1. CONSTRUCTION MEETS LATEST A.S.M.E. "UM" CODE & ADDENDA.
 2. ALL WELDS TO BE GTAW (OR) AND GMAW.
 3. MAXIMUM WORKING PREISSION: 142 P.S.I.G. @ 100°F.
 4. HYDROSTATIC TEST: 213 P.S.I.G. @ 100°F.
 5. FINISH: WHITE PICKLE.
 WELDS ARE AS WELDED.

BT-15	BT-6	CAL0001	NOTICE THIS DRAWING AND THE DATA SHOWN ARE PROPRIETARY INFORMATION AND SHALL NOT BE USED WITHOUT APPROVAL OF ALLOY PRODUCTS CORP.	DWG. UNITS ARE IN INCHES UNLESS OTHERWISE SPEC'D.	TOLERANCES: .XX DECIMALS ±.030 .XXX DECIMALS ±.015 ANGLES ±1°	DRAWN	DATE	9" I.D. TANK ASSEMBLY L.O.C. VACUUM LID 3 GALLON W/STD. METAL SKIRT A.S.M.E.	304
GG	7-12-2000					APPR'D	PLTD SCALE		
PE	1/5	ALLOY PRODUCTS CORP WAUKESHA, WISCONSIN		DWG. NO.	C530-3519-00		REV.	K	